

Product Datasheet

PORTAflex CUPOLA Inflatable Decontamination Shelter



Combined with the hose assembly from the PORTAflex 300/16e, this inflatable decontamination shelter is specifically designed for use where contaminated water needs to be contained. The replaceable inner lining has windows on two opposite sides to enable the decontamination process to be observed while openings on the other two sides enable personnel to walk through from the dirty to the clean area.

Specifications

MATERIALS	
INFLATABLE FRAME	Neoprene coated polyester
LINER	Polyurethane coated polyester
SUMP	Nylon/butyl/nylon
PARTITION	Polyurethane coated polyester
WINDOWS	Velbex clear plastic
CARDAGE	Terylene or nylon
SERVICES	
VALVE - INFLATE ONLY	Rectus type 25 KS NW 7.8
VALVE - INFLATE/DEFLATE	Type A5
VALVE - RELIEF	Mirada 0.2 bar
MINIMUM FLOW RATES	75 litres/minute (20 US Gallons)
INLET SIZE COUPLING	2½" instantaneous
ASSEMBLY TIME	Less than 7 minutes
WEIGHTS and DIMENSIONS	
DIMENSIONS - Packed (WxDxH)	600mm (23.6in) x 500mm (19.7in) x 1200mm (47.2in)
DIMENSIONS - Assembled (WxDxH)	2200mm (86.6in) x 2200mm (86.6in) x 2900mm (114.2in)
WEIGHT	45kg (99lb)

View our Guide to the ANSI/ISEA Z358.1-2014 International Standard for Emergency Eyewash and Shower Equipment at www.hughes-safety.com



HUGHES





HUGHES-SAFETY.COM

Justrite Safety Group

www.hughes-safety.com

PORTAflex CUPOLA

Portable & Inflatable Decontamination Shelter

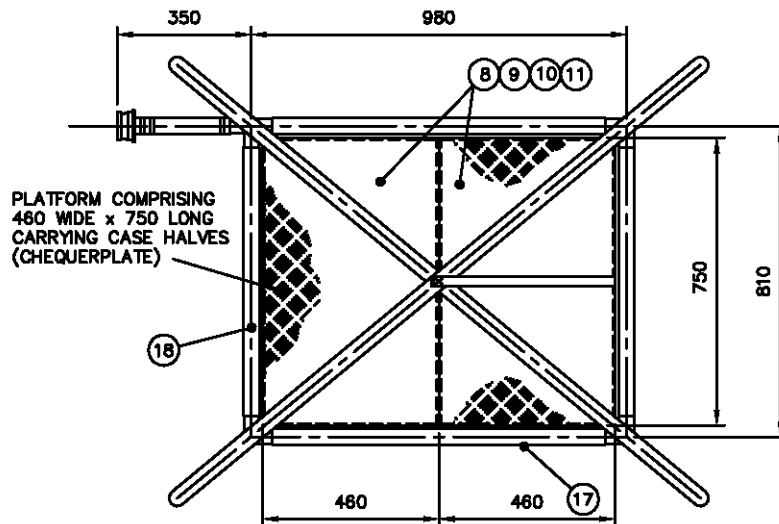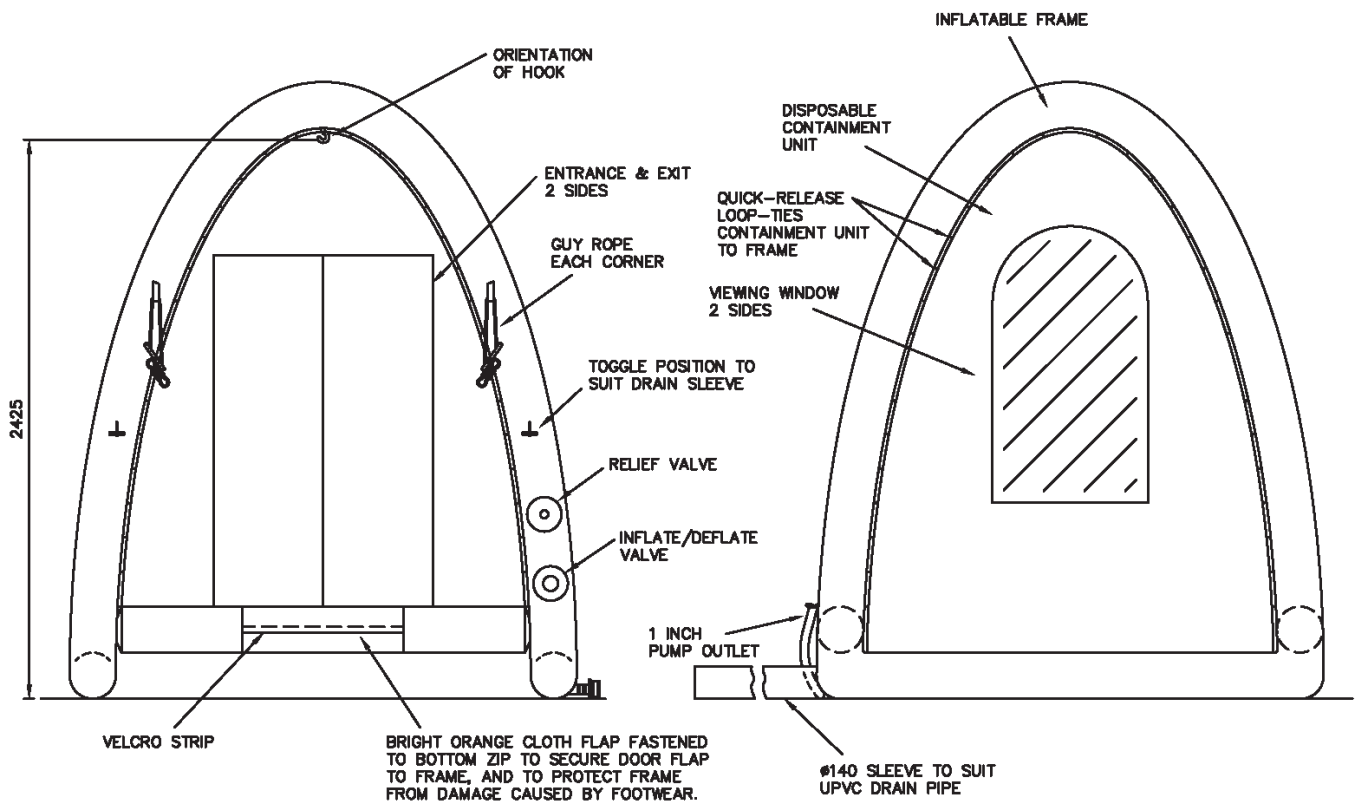

HUGHES



HUGHES-SAFETY.COM

Justrite Safety Group

Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK.

Email: sales@hughes-safety.com

Tel: +44 (0)161 430 6618

Registered No. 0939240. VAT Registration No. 918 5005 32. Hughes Safety Showers Ltd is a Justrite Group Company.