

Product Datasheet


Self-draining safety shower and stainless steel open bowl eye wash within a protective double frame

EXP-SD-65GS

The self-draining safety shower and eye/face wash are each housed in their own designated area within a stainless steel protective frame. For casualties negotiating their way to the shower, the hand rails provide extra support if necessary.

The self-draining feature allows standing water to drain from the standpipe to avoid it heating up and potentially scalding a user, an essential benefit for hot climates. Designed to meet EN15154 and ANSI Z358.1-2014 standards.

Supplied with safety shower and eye/face wash sign including inserts for mounting to the pipework.

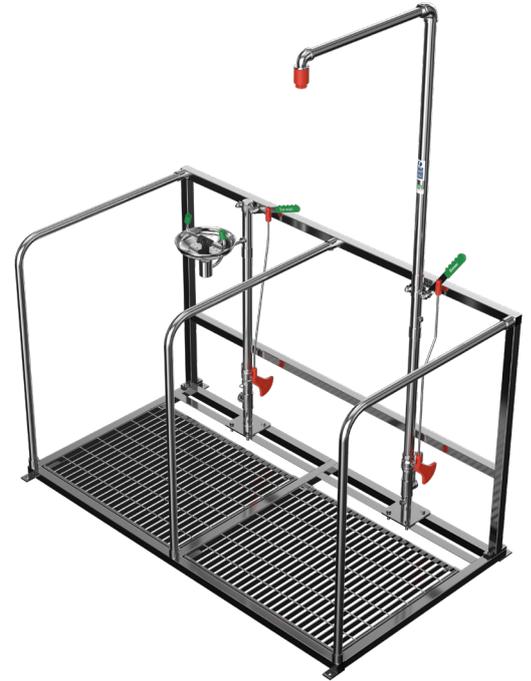

Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel
FRAME	Stainless steel
OPERATING VALVE	Stainless steel, full bore, stay open ball valve
SHOWER NOZZLE	Injection moulded nylon 6
EYE WASH BOWL	Stainless steel
EYE WASH DIFFUSERS	Chrome plated brass retaining ring, stainless steel filter mesh, plastic body
STANDARD FINISH	Polished brush
SERVICES	
WATER INLET	1¼" female BSP
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	Shower: 76 L per minute / 20 US gal per minute Eye wash: 12 L per minute / 3 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	55C / 131F
OPERATION	
SHOWER	Push down lever
EYE WASH	Push down lever
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	1638mm (64.5in) x 1080mm (42.5in) x 2300mm (90.6in)
WEIGHT	115kg (254lb)

General Arrangement Drawing

Self-draining safety shower and stainless steel open bowl eye wash within a protective double frame

EXP-SD-65GS

