

Product Datasheet


Double Nozzle Eye, Face and Body

Optiflex 500

Optiflex 600

Intended for hazardous environments where there is the possibility of minor spillages of chemicals or dangerous substances. This double nozzle handheld eye, face and body shower is available in two variants, wall or table mounted to suit indoor locations. The long reinforced hose enables ease of movement during washing of the affected area.

- Quick to activate lock-on actuating button for ease of use
- Nozzles protected by dust covers deliver 14 litres per minute flow rate for a thorough rinse of the affected area

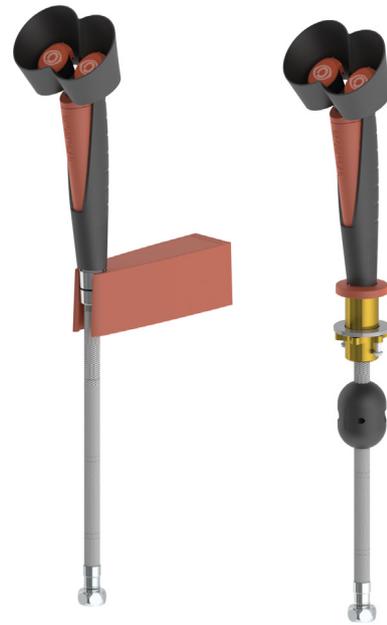

Specifications

MATERIALS OF CONSTRUCTION	
SPRAY OUTLET	Ethylene propylene (EPDM)
SAFETY EYE CUPS	Ethylene propylene (EPDM)
DUST COVERS AND BODY	Plastic
STANDARD FINISH	Black and red
SERVICES	
WATER INLET	1/2" Female BSP (hose connection)
OPERATING PRESSURE	1 to 10 BAR G / 14 to 145 PSI
MINIMUM FLOW RATES	14 L per minute / 3.7 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
EYE/FACE WASH	Lock-on actuating button
WEIGHT	
WEIGHT	0.5kg / 1.1lb

General Arrangement Drawing

Double Nozzle Eye, Face and Body Shower

Optiflex 500

Optiflex 600

