


# Product Datasheet

## Ring main mounted unheated safety shower

23GRM  
23GS

Connect this emergency safety shower directly to the water ring main pipework for the perfect space saving and simple to install option. Ideal for indoor use, the shower will deliver 76 liters (20 US gal) of water per minute for a thorough decontamination. Meets ANSI Z358.1-2014 standards.

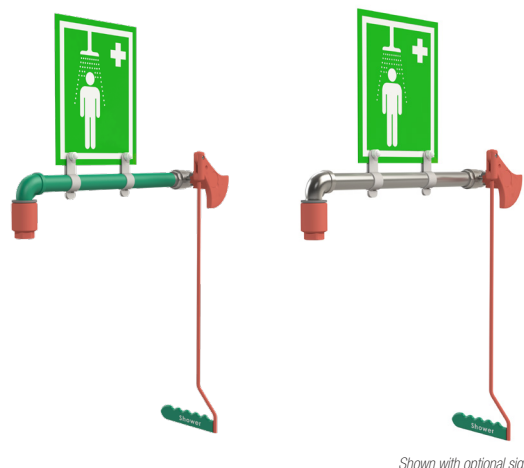

*Shown with optional sign*

## Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel (GS) or galvanized mild steel (G)
OPERATING VALVE	Stainless steel, full bore, stay open ball valve
SHOWER NOZZLE	Injection moulded nylon 6
STANDARD FINISH	Polished brush (GS) or green powder coated (G)
SERVICES	
WATER INLET	1" female NPT
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	76 L per minute / 20 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER/BODY SPRAY	Pull handle
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	161mm (6.3in) x 672mm (26.4in) x 635mm (25in)
WEIGHT	3kg (7lb)

# General Arrangement Drawing

## Ring main mounted unheated safety shower

23GRM

23GS

