

# Product Datasheet

## Self-draining pedestal mounted eye wash with stainless steel open bowl

SD85GP

SD85GSP

Designed for use in hot climates. The intense heat experienced in some locations can increase the temperature of standing water within the pipes of the pedestal mounted eye wash to dangerous levels. The self-draining valve featured on this model ensures standing water is drained away to avoid exasperating the injury. The UV resistant properties of the stainless steel bowl make it ideal for hot environments. Meets ANSI Z358.1-2014 standards.



## Specifications


MATERIALS OF CONSTRUCTION	
BOWL/LID	Stainless steel
DIFFUSERS	Chrome plated brass retaining ring, stainless steel filter mesh, plastic body
PIPEWORK	Stainless steel (GS) or galvanized mild steel (G)
STANDARD FINISH	Green powder coated (alternative colours available) (G) Polished brush finish (paint options available) (GS)
SERVICES	
WATER INLET	1 1/4" Female NPT
OPERATING PRESSURE	2.0 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	12 L per minute / 3 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	55C / 131F
OPERATION	
EYE/FACE WASH	Push down lever (optional foot treadle control for hands free operation)
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	400mm (15.7in) x 505mm (19.9in) x 1273mm (50.1in)
WEIGHT	10kg / 22lb

# General Arrangement Drawing

## **Self-draining pedestal mounted eye wash with stainless steel open bowl**

SD85GP

SD85GSP

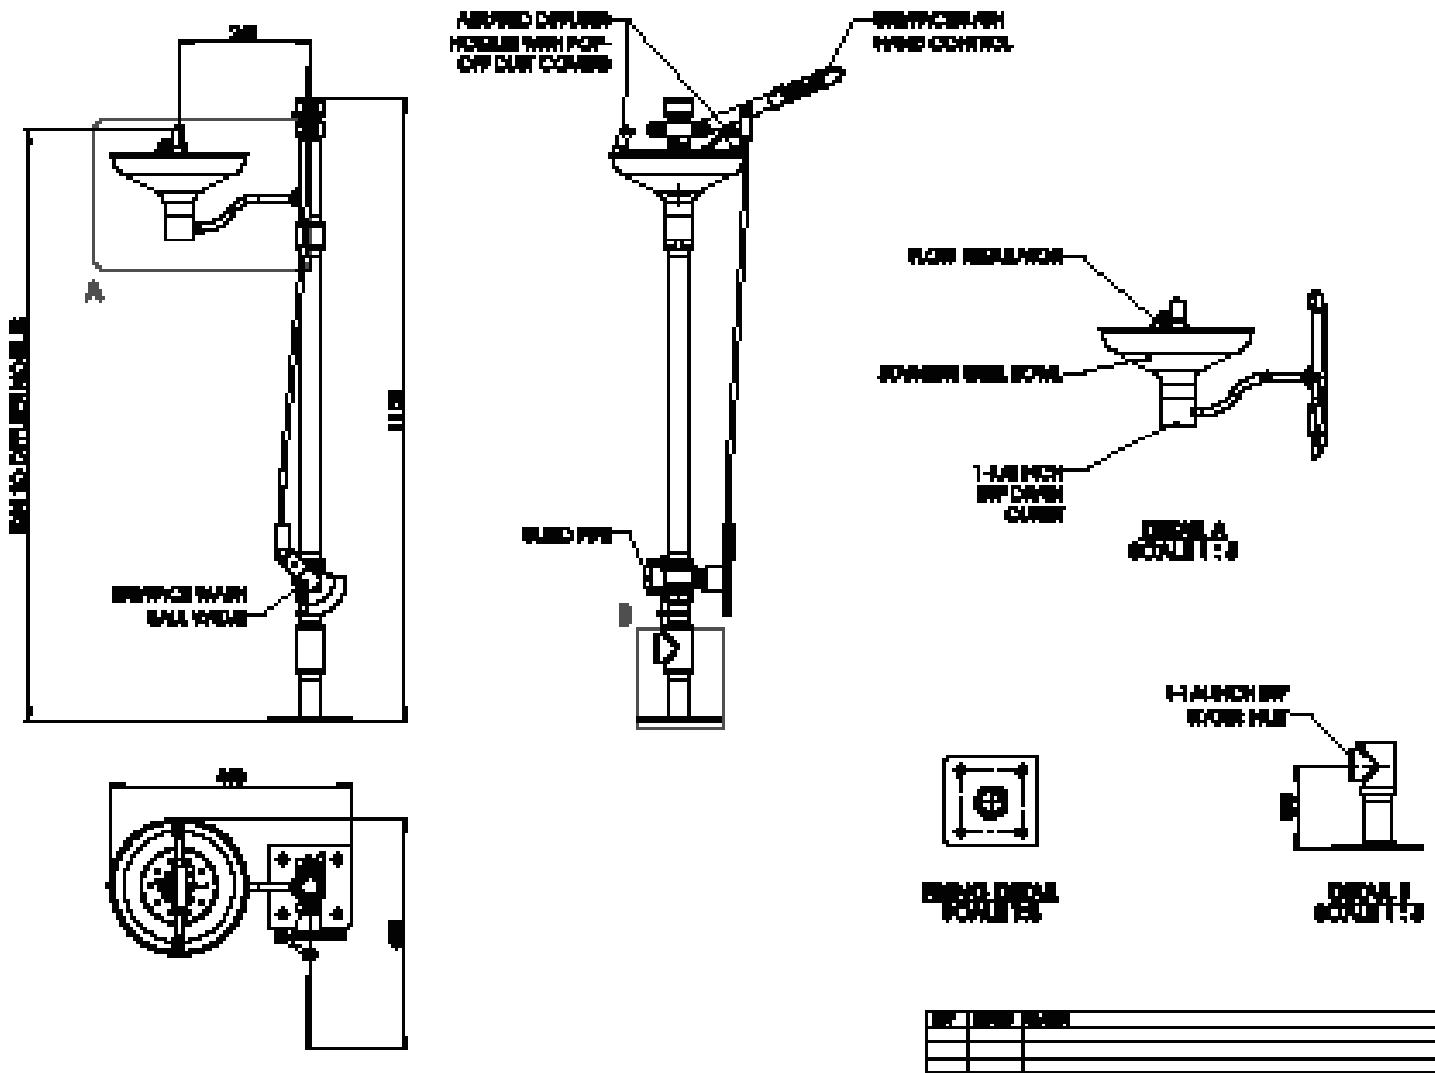

[www.hughes-safety.com](http://www.hughes-safety.com)

Hughes Safety Showers Ltd, 457 Campbell Street, Sarnia, Ontario N7T 2J1 Canada  
**T: 1-866-312-1652 E: [customer.service@hughes-safety.com](mailto:customer.service@hughes-safety.com)**