

# Product Datasheet

## STD-40K/45G

### Mobile Self-Contained Emergency Safety Shower

114 litre capacity unheated mobile self-contained emergency safety shower with eye/face wash unit. Incorporating a polypropylene lined cylinder, a stainless-steel frame and large pneumatic tyres making it easy to manoeuvre by one person.

#### Options:

- Hand-held eye, face and body shower
- Retrofittable insulated jacket - offers frost protection
- Retrofittable heated jacket - prevents water within the tank freezing



## Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	316L stainless-steel
OPERATING VALVE	316L stainless-steel
SHOWER NOZZLE	UPVC
STANDARD FINISH	White gloss powder coated tank (RAL 1013)
SERVICES	
CAPACITY	114 litres (30 US Gallons)
WATER INLET	1/2" quick release hose connector
DESIGN OPERATING PRESSURE	3 to 5.5 Bar (29 to 87 PSI)
MINIMUM FLOW RATES	Shower: 76 litres/minute (20 US Gallons). Eye/face wash: 12 litres/minute (3 US Gallons)
ENVIRONMENTAL OPERATING TEMPERATURES	
MINIMUM OPERATING TEMPERATURE	5C (41F)
MAXIMUM OPERATING TEMPERATURE	35C (95F)
OPERATION	
SHOWER	Hand lever
EYE/FACE WASH	Pull lid forward
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	Assembled: 734mm (28.8in) x 1462mm (57.5in) x 2348mm (92.4in)
WEIGHT	80kg (176lb)

# HUGHES




HUGHES-SAFETY.COM

Justrite Safety Group

www.hughes-safety.com

## STD-40K/45G

Mobile Self-Contained Emergency Safety Shower

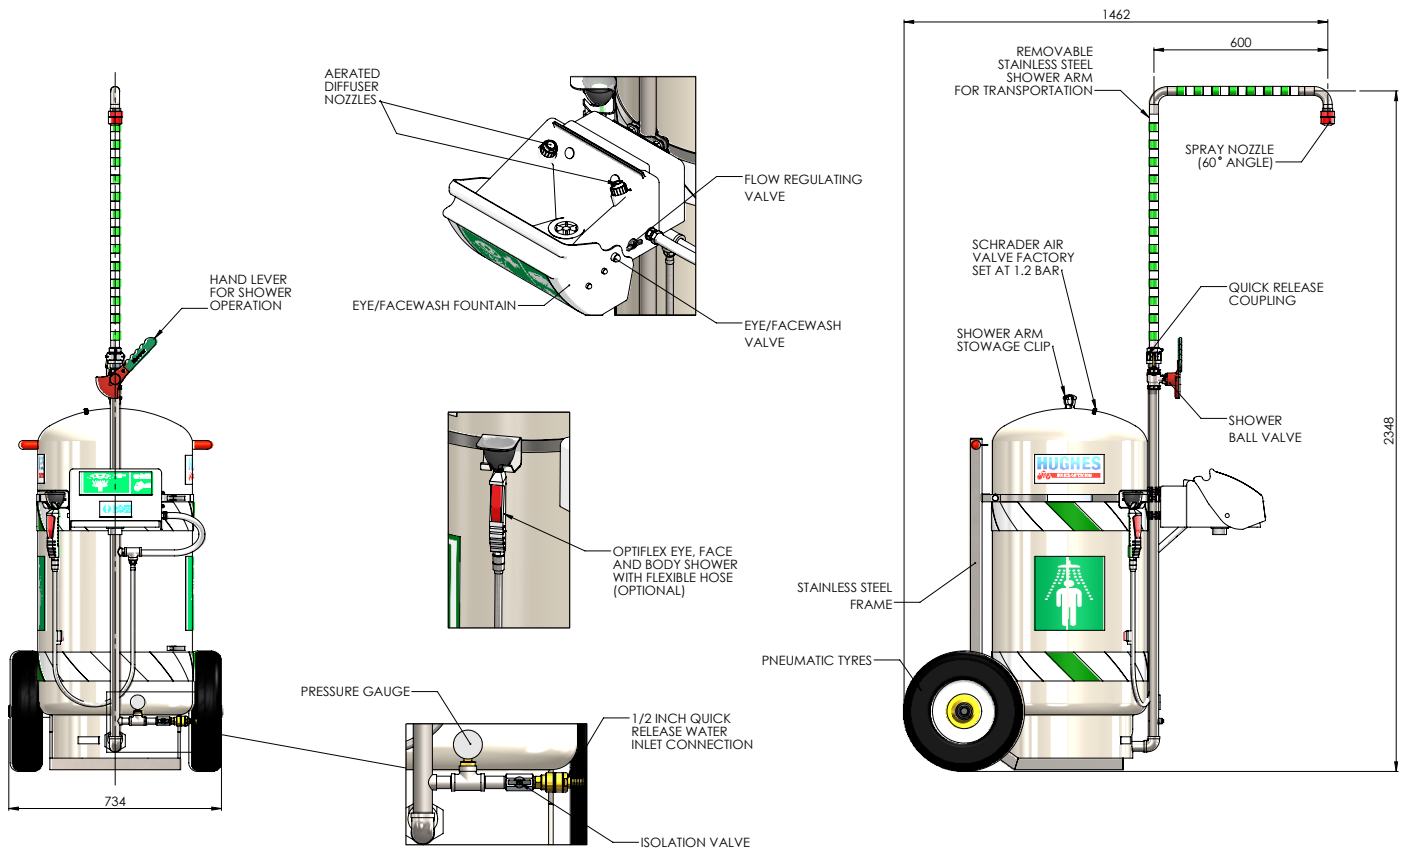

# HUGHES



HUGHES-SAFETY.COM

Justrite Safety Group

Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK.

Email: [sales@hughes-safety.com](mailto:sales@hughes-safety.com)

Tel: +44 (0)161 430 6618

Registered No. 0939240. VAT Registration No. 918 5005 32.